CNL 1001

CHARACTERISTICS

. Pull-out compact hood
. Push button control panel
. Stainless steel front (fingerprint proof)
. Stainless steel, white or dark
. One motor
. Exhaust capacities; maximum in test conditions: 595 m3/h, free outlet: 425 m3/h, UNE-EN-61591: 272 m3/h
. Recommended for kitchens up to 10 m2
. 3 speeds
. Candle type lamps
. Removable front panel
. Automatic switch on/off
. Metal filters
. Sound level (UNE-EN 60704-2-13): 49 dBA

TECHNICAL DRAWING

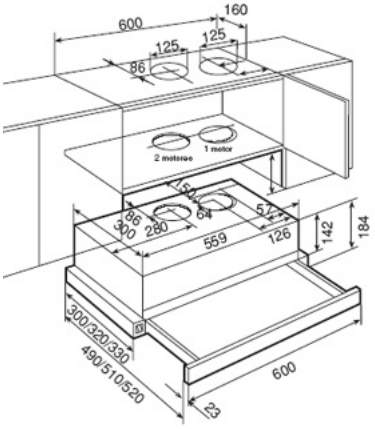

Electric Characteristics

Power supply (V) 220-240 / 50 Hz	•
Power supply (V) 127 / 60 Hz	-
Light power (W)	2 x 40
Motor power (W)	125
Maximum power (W)	205
Air outlet (ø mm)	120
Reduction outlet (ø 150 / ø 120)	-
Optional recirculation kit	•

Capacity and sound levels

Exhaust capacity, test conditions (m3/h)	595
Exhaust capacity, free outlet (m3/h)	425
Exhaust capacity, UNE EN 61591 (m3/h)	272
Sound power level dBA UNE EN 60704-2-13	63
Sound level (re 1pw UNE EN 60704-2-13) dB	49
Maximum recommended kitchen size (m2)	10

Control panel

Touch control	-
Electronic	-
Push button	•
Mechanical slider	-
Mechanical inswing	-

Features

Number of motors	1
Double turbine motor	-
Armoured motor	-
Number of speeds	3
Stop delay timer	-
Easy-clean inside panel	-
Decorative filters	-
Metal filters	•
Operating pilot light	-
Filter saturation indicator	-
Humidity detector	-
Perimetric extraction system	-